lex 1

Introduction

A software tool known as`lex` enables you solve a wide class of problems drawn from text processing, code enciphering, compiler writing, and other areas. In text processing, you might check the spelling of words for errors; in code enciphering, you might translate certain patterns of characters into others; and in compiler writing, you might determine what the tokens (smallest meaningful sequences of characters) are in the program to be compiled.

The task common to all these problems is lexical analysis: recognizing different strings of characters that satisfy certain characteristics. Hence the name `lex`. You don't have to use `lex` to handle problems of this kind. You could write programs in a standard language like C to handle them, too. In fact, what `lex` does is produce such C programs. (`lex` is therefore called a program generator.)

What `lex` offers you is typically a faster, easier way to create programs that perform these tasks. Its weakness is that it often produces C programs that are longer than necessary for the task at hand and that execute more slowly than they otherwise might. In many applications this is a minor consideration, and the advantages of using `lex` considerably outweigh it.

`lex` can also be used to collect statistical data on features of an input text, such as character count, word length, number of occurrences of a word, and so forth. In the remaining sections of this chapter, you will see the following:

1

- Generating a lexical analyzer program
- Writing `lex` source
- Translating `lex` source
- Using `lex` with `yacc`

Internationalization

To use `lex` in the development of applications in languages other than English, see `lex` (1) for further information.

Generating a Lexical Analyzer Program

`lex` generates a C-language scanner from a source specification that you write to solve the problem at hand. This specification consists of a list of rules indicating sequences of characters — expressions — to be searched for in an input text, and the actions to take when an expression is found. To see how to write a `lex` specification see the section Writing lex Source.

The C source code for the lexical analyzer is generated when you enter

```
$ lex lex.l
```

where `lex.l` is the file containing your `lex` specification. (The name `lex.l` is conventionally the favorite, but you may use whatever name you want. Keep in mind, though, that the `.l` suffix is a convention recognized by other system tools, in particular, `make`.) The source code is written to an output file called `lex.yy.c` by default. That file contains the definition of a function called `yylex()` that returns 1 whenever an expression you have specified is found in the input text, 0 when end of file is encountered. Each call to `yylex()` parses one token (assuming a return); when `yylex()` is called again, it picks up where it left off.

Note that running `lex` on a specification that is spread across several files, as in the following example, produces one `lex.yy.c`:

```
$ lex lex1.l lex2.l lex3.l
```

Invoking `lex` with the `-t` option causes it to write its output to `stdout` rather than `lex.yy.c`, so that it can be redirected:

```
$ lex -t lex.l > lex.c
```

Options to `lex` must appear between the command name and the filename argument.

The lexical analyzer code stored in `lex.yy.c` (or the `.c` file to which it was redirected) must be compiled to generate the executable object program, or scanner, that performs the lexical analysis of an input text.

The `lex` library supplies a default `main()` that calls the function `yylex()`, so you need not supply your own `main()`. The library is accessed by invoking the `-ll` option to `cc`:

```
$ cc lex.yy.c -ll
```

Alternatively, you may want to write your own driver. The following is similar to the library version:

```
extern int yylex();

int yywrap()
{
    return(1);
}

main()
{
    while (yylex())
        ;
}
```

For moreinformation about the function `yywrap` , see the Writing lex Source" section . Note that when your driver file is compiled with `lex.yy.c`, as in the following example, its `main()` will call `yylex()` at run time exactly as if the `lex` library had been loaded:

```
$ cc lex.yy.c driver.c
```

1

The resulting executable file reads `stdin` and writes its output to `stdout`. Figure 1-1 shows how `lex` works.

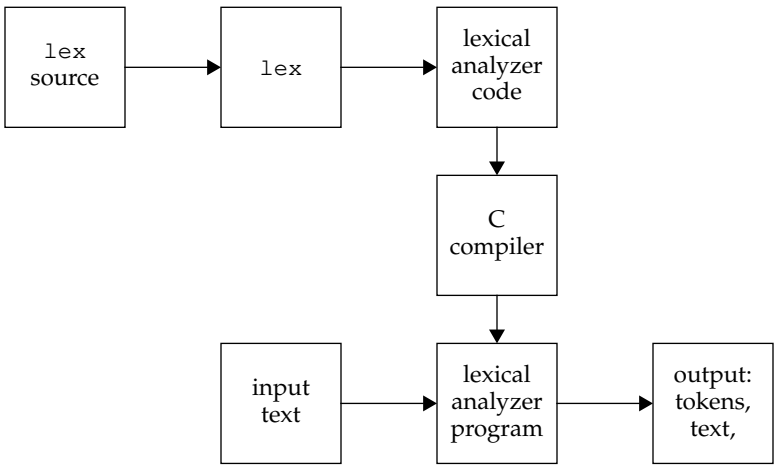

Figure 1-1 Creation and Use of a Lexical Analyzer with `lex`

Writing `lex` *Source*

`lex` source consists of at most three sections: definitions, rules, and user-defined routines. The rules section is mandatory. Sections for definitions and user routines are optional, but if present, must appear in the indicated order:

```
definitions
%%
rules
%%
user routines
```

The Fundamentals of `lex` *Rules*

The mandatory rules section opens with the delimiter `%%`. If a routines section follows, another `%%` delimiter ends the rules section. The `%%` delimiters must be entered at the beginning of a line, that is, without leading blanks. If there is no second delimiter, the rules section is presumed to continue to the end of the program.

Lines in the rules section that begin with white space and that appear before the first rule are copied to the beginning of the function `yylex()`, immediately after the first brace. You might use this feature to declare local variables for `yylex()`.

Each rule consists of a specification of the pattern sought and the action(s) to take on finding it. The specification of the pattern must be entered at the beginning of a line. The scanner writes input that does not match a pattern directly to the output file. So the simplest lexical analyzer program is just the beginning rules delimiter, `%%`. It writes out the entire input to the output with no changes at all. Typically, the rules are more elaborate than that.

Regular Expressions

You specify the patterns you are interested in with a notation called a regular expression. A regular expression is formed by stringing together characters with or without operators. The simplest regular expressions are strings of text characters with no operators at all:

```
apple
orange
pluto
```

These three regular expressions match any occurrences of those character strings in an input text. If you want to have the scanner remove every occurrence of `orange` from the input text, you could specify the rule

```
orange ;
```

Because you specified a null action on the right with the semicolon, the scanner does nothing but print the original input text with every occurrence of this regular expression removed, that is, without any occurrence of the string `orange` at all.

Operators

Unlike `orange` above, most of the expressions that you want to search for cannot be specified so easily. The expression itself might be too long, or, more commonly, the class of desired expressions is too large; it may, in fact, be infinite.

With the use of operators — summarized in Table 1-1 on page 8 — we can form regular expressions to signify any expression of a certain class. The + operator, for instance, means one or more occurrences of the preceding expression, the ? means 0 or 1 occurrence(s) of the preceding expression (which is equivalent to saying that the preceding expression is optional), and * means 0 or more occurrences of the preceding expression. (It may at first seem odd to speak of 0 occurrences of an expression and to need an operator to capture the idea, but it is often quite helpful. We will see an example in a moment.) So `m+` is a regular expression that matches any string of `m`s:

```
mmm
m
mmmmm
```

and `7*` is a regular expression that matches any string of zero or more `7`s:

```
77
77777

777
```

The empty third line matches because it has no `7`s in it at all.

The | operator indicates alternation, so that `ab|cd` matches either `ab` or `cd`. The operators `{}` specify repetition, so that `a{1,5}` looks for 1 to 5 occurrences of `a`. Brackets, `[]`, indicate any one character from the string of characters specified between the brackets. Thus, `[dgka]` matches a single `d`, `g`, `k`, or `a`. Note that the characters between brackets must be adjacent, without spaces or punctuation. The `^` operator, when it appears as the first character after the left bracket, indicates all characters in the standard set except those specified between the brackets. (Note that `|`, `{}`, and `^` may serve other purposes as well.) Ranges within a standard alphabetic or numeric order (`A` through `Z`, `a` through `z`, `0` through `9`) are specified with a hyphen. `[a-z]`, for instance, indicates any lowercase letter.

```
[A-Za-z0-9*&#]
```

This is a regular expression that matches any letter (whether upper or lowercase), any digit, an asterisk, an ampersand, or a #.

Given the following input text, the lexical analyzer with the previous specification in one of its rules will recognize `*`, `&`, `r`, and `#`, perform on each recognition whatever action the rule specifies (we have not indicated an action here), and print the rest of the text as it stands:

```
$$$$?? ????!!!*$$ $$$$$$&+====r~~# ((
```

To include the hyphen character in the class, have it appear as the first or last character in the brackets: `[-A-Z]` or `[A-Z-]`.

The operators become especially powerful in combination. For example, the regular expression to recognize an identifier in many programming languages is:

```
[a-zA-Z][0-9a-zA-Z]*
```

An identifier in these languages is defined to be a letter followed by zero or more letters or digits, and that is just what the regular expression says. The first pair of brackets matches any letter. The second, if it were not followed by a `*`, would match any digit or letter.

The two pairs of brackets with their enclosed characters would then match any letter followed by a digit or a letter. But with the `*`, the example matches any letter followed by any number of letters or digits. In particular, it would recognize the following as identifiers:

```
e
not
idenTIFIER
pH
EngineNo99
R2D2
```

Note that it would not recognize the following as identifiers because `not_idenTIFIER` has an embedded underscore; `5times` starts with a digit, not a letter; and `$hello` starts with a special character:

```
not_idenTIFIER
5times
$hello
```

A potential problem with operator characters is how we can specify them as characters to look for in a search pattern. The last example, for instance, will not recognize text with a * in it. `lex` solves the problem in one of two ways: an operator character preceded by a backslash, or characters (except backslash) enclosed in double quotation marks, are taken literally, that is, as part of the text to be searched for.

To use the backslash method to recognize, say, a * followed by any number of digits, we can use the pattern:

```
\*[1-9]*
```

To recognize a \ itself, we need two backslashes: \\. Similarly, `"x\*x"` matches x*x, and `"y\"z"` matches y"z. Other `lex` operators are noted as they arise; see Table 1-1:

Table 1-1 `lex` Operators

Expression	Description
\x	*x*, if *x* is a lex operator
"*xy*"	*xy*, even if x or y are lex operators (except \)
[*xy*]	*x* or *y*
[*x*-*z*]	*x*, *y*, or *z*
[^*x*]	any character but *x*
.	any character but newline
^*x*	x at the beginning of a line
<*y*>*x*	x when lex is in start condition *y*
x$	*x* at the end of a line
x?	optional *x*
x*	0, 1, 2, ... instances of *x*
x+	1, 2, 3, ... instances of *x*
x{*m*,*n*}	*m* through *n* occurrences of *x*

Table 1-1 `lex` Operators

Expression	Description
xx|*yy*	either *xx* or *yy*
x |	the action on *x* is the action for the next rule
(x)	x
x/*y*	x but only if followed by *y*
{*xx*}	the translation of *xx* from the definitions section

Actions

Once the scanner recognizes a string matching the regular expression at the start of a rule, it looks to the right of the rule for the action to be performed. You supply the actions.

Kinds of actions include recording the token type found and its value, if any; replacing one token with another; and counting the number of instances of a token or token type. You write these actions as program fragments in C.

An action may consist of as many statements as are needed for the job at hand. You may want to change the text in some way or print a message noting that the text has been found. So, to recognize the expression Amelia Earhart and to note such recognition, apply the rule

```
"Amelia Earhart" printf("found Amelia");
```

To replace lengthy medical terms in a text with their equivalent acronyms, a rule such as the following would be called for:

```
Electroencephalogram printf("EEG");
```

To count the lines in a text, we need to recognize the ends of lines and increment a line counter.

As we have noted, `lex` uses the standard C escape sequences, including `\n` for newline. So, to count lines we might have the following syntax, where `lineno`, like other C variables, is declared in the Definitions section.

```
\n  lineno++;
```

Input is ignored when the C language null statement; is specified. So the following rule causes blanks, tabs, and new-lines to be ignored:

```
[ \t\n] ;
```

Note that the alternation operator | can also be used to indicate that the action for a rule is the action for the next rule. The previous example could have been written with the same result:

```
" " |
\t  |
\n  ;
```

The scanner stores text that matches an expression in a character array called `yytext[]`. You can print or manipulate the contents of this array as you like. In fact, `lex` provides a macro called `ECHO` that is equivalent to `printf ("%s", yytext)`.

Sometimes your action may consist of a long C statement, or two or more C statements, and you must (or for style and clarity, you choose to) write it on several lines. To inform `lex` that the action is for one rule only, simply enclose the C code in braces.

For example, to count the total number of all digit strings in an input text, print the running total of the number of digit strings, and print out each one as soon as it is found, your `lex` code might be:

```
\+?[1-9]+           { digstrngcount++;
                    printf("%d",digstrngcount);
                    printf("%s", yytext); }
```

This specification matches digit strings whether they are preceded by a plus sign because the `?` indicates that the preceding plus sign is optional. In addition, it will catch negative digit strings because that portion following the minus sign will match the specification.

`lex` *Advanced Features*

You may process input text riddled with quite complicated patterns by using a suite of features provided by `lex`. These include rules that decide what specification is relevant when more than one seems so at first; functions that transform one matching pattern into another; and the use of definitions and subroutines.

Here is an example that draws together several of the points already covered:

```
%%
-[0-9]+          printf("negative integer");
\+?[0-9]+        printf("positive integer");
-0.[0-9]+        printf("negative fraction, no whole number
part");
rail[ \t]+road   printf("railroad is one word");
crook            printf("Here's a crook");
function         subprogcount++;
G[a-zA-Z]*       { printf("may have a G word here:%s", yytext);
                 Gstringcount++; }
```

The first three rules recognize negative integers, positive integers, and negative fractions between 0 and –1. The use of the terminating + in each specification ensures that one or more digits compose the number in question.

Each of the next three rules recognizes a specific pattern:

- The specification for `railroad` matches cases where one or more blanks intervene between the two syllables of the word. In the cases of `railroad` and `crook`, we could have printed a synonym rather than the messages stated.
- The rule recognizing a `function` increments a counter.
- The last rule illustrates several points:
  - The braces specify an action sequence that extends over several lines.
  - Its action uses the `lex` array `yytext[]`, which stores the recognized character string.
  - Its specification uses the `*` to indicate that zero or more letters may follow the `G`.

Some Special Features

Besides storing the matched input text in `yytext[]`, the scanner automatically counts the number of characters in a match and stores it in the variable `yyleng`. You may use this variable to refer to any specific character just placed in the array `yytext[]`.

Remember that C language array indexes start with 0, so to print the third digit (if there is one) in a just-recognized integer, you might enter

```
[1-9]+        {if (yyleng > 2)
              printf("%c", yytext[2]); }
```

`lex` follows a number of high-level rules to resolve ambiguities that may arise from the set of rules that you write. In the following lexical analyzer example, the "reserved word" `end` could match the second rule as well as the eighth, the one for identifiers:

```
begin                   return(BEGIN);
end                     return(END);
while                   return(WHILE);
if                      return(IF);
package                 return(PACKAGE);
reverse                 return(REVERSE);
loop                    return(LOOP);
[a-zA-Z][a-zA-Z0-9]*    { tokval = put_in_tabl();
                        return(IDENTIFIER); }
[0-9]+                  { tokval = put_in_tabl();
                        return(INTEGER); }
\+                      { tokval = PLUS;
                        return(ARITHOP); }
\-                      { tokval = MINUS;
                        return(ARITHOP); }
>                       { tokval = GREATER;
                        return(RELOP); }
>=                      { tokval = GREATEREQL;
                        return(RELOP); }
```

`lex` follows the rule that, where there is a match with two or more rules in a specification, the first rule is the one whose action will be executed. By placing the rule for `end` and the other reserved words before the rule for identifiers, we ensure that our reserved words will be duly recognized.

Another potential problem arises from cases where one pattern you are searching for is the prefix of another. For instance, the last two rules in the lexical analyzer example above are designed to recognize > and >=. If the text has the string >= at one point, you might worry that the lexical analyzer would stop as soon as it recognized the > character and execute the rule for >, rather than read the next character and execute the rule for >=.

`lex` follows the rule that it matches the longest character string possible and executes the rule for that. Here the scanner would recognize the >= and act accordingly. As a further example, the rule would enable you to distinguish + from ++ in a C program.

Still another potential problem exists when the analyzer must read characters beyond the string you are seeking because you cannot be sure that you've found it until you've read the additional characters.

These cases reveal the importance of trailing context. The classic example here is the `DO` statement in FORTRAN. In the statement, we cannot be sure that the first 1 is the initial value of the index `k` until we read the first comma:

```
DO 50 k = 1 , 20, 1
```

Until we read the first comma, we might have the assignment statement:

```
DO50k = 1
```

Remember that FORTRAN ignores all blanks. The way to handle this is to use the slash, `/`, which signifies that what follows is trailing context, something not to be stored in `yytext[]`, because the slash is not part of the pattern itself.

So the rule to recognize the FORTRAN `DO` statement could be:

```
DO/([ ]*[0-9]+[ ]*[a-zA-Z0-9]+=[a-zA-Z0-9]+,) {
    printf("found DO");
    }
```

Different versions of FORTRAN have limits on the size of identifiers, here the index name. To simplify the example, the rule accepts an index name of any length.

See the Start Conditions section for a discussion of `lex`'s similar handling of prior context.

`lex` uses the `$` symbol as an operator to mark a special trailing context — the end of a line. An example would be a rule to ignore all blanks and tabs at the end of a line:

```
[ \t]+$ ;
```

The above could also be written as:

```
[ \t]+/\n ;
```

On the other hand, if you want to match a pattern only when it starts a line or a file, you can use the `^` operator. Suppose a text-formatting program requires that you not start a line with a blank. You might want to check input to the program with some such rule as:

```
^[ ]   printf("error: remove leading blank");
```

Note the difference in meaning when the `^` operator appears inside the left bracket.

`lex` *Routines*

Some of your action statements themselves may require you to perform an action. Three macros are supplied:

- input() reading another character
- unput() putting one back to be read again a moment later
- output() writing a character on an output device

One way to ignore all characters between two special characters, say between a pair of double quotation marks, would be to use `input()`, thus:

```
\"      while (input() != '"');
```

Upon finding the first double quotation mark, the scanner will continue reading all subsequent characters so long as none is a double quotation mark, and not look for a match again until it finds a second double quotation mark. (See the further examples of `input()` and `unput(c)` usage in the User Routines section.)

By default, these routines are provided as macro definitions. To handle special I/O needs, such as writing to several files, use standard I/O routines in C to rewrite the functions.

Note, however, that these routines must be modified consistently. In particular, the character set used must be consistent in all routines, and a value of 0 returned by `input()` must mean end of file. The relationship between `input()` and `unput(c)` must be maintained or the `lex` lookahead will not work.

If you do provide your own `input()`, `output(c)`, or `unput(c)`, you will have to write a `#undef input` and so on in your definitions section first:

```
#undef input
#undef output
   .
   .
   .
#define input() ...  etc.
more declarations
   .
   .
   .
```

Your new routines will replace the standard ones. See the Definitions section for further details.

A `lex` library routine that you may sometimes want to redefine is `yywrap()`, which is called whenever the scanner reaches the end of fa ile. If `yywrap()` returns 1, the scanner continues with normal wrapup on the end of input. Occasionally, however, you may want to arrange for more input to arrive from a new source. In that case, redefine `yywrap()` to return 0 whenever further processing is required. The default `yywrap()` always returns 1.

Note that it is not possible to write a normal rule that recognizes end of file; the only access to that condition is through `yywrap()`. Unless a private version of `input()` is supplied, a file containing nulls cannot be handled because a value of 0 returned by `input()` is taken to be end of file.

There are a number of `lex` routines that let you handle sequences of characters to be processed in more than one way. These include `yymore()`, `yyless(`*n*`)`, and `REJECT`. Recall that the text that matches a given specification is stored in the array `yytext[]`. In general, once the action is performed for the specification, the characters in `yytext[]` are overwritten with succeeding characters in the input stream to form the next match.

The function `yymore()`, by contrast, ensures that the succeeding characters recognized are appended to those already in `yytext[]`. This lets you do things sequentially, such as when one string of characters is significant and a longer one including the first is significant as well.

Consider a language that defines a string as a set of characters between double quotation marks and specifies that to include a double quotation mark in a string, it must be preceded by a backslash. The regular expression matching that is somewhat confusing, so it might be preferable to write:

```
\"[^"]* {
    if (yytext[yyleng-2] == '\\')
        yymore();
    else
        ...  normal processing
    }
```

When faced with the string `"abc\"def"`, the scanner will first match the characters `"abc\`, whereupon the call to `yymore()` will cause the next part of the string `"def` to be tacked on the end. The double quotation mark terminating the string should be picked up in the code labeled "normal processing."

The function `yyless(`*n*`)` lets you specify the number of matched characters on which an action is to be performed: only the first *n* characters of the expression are retained in `yytext[]`. Subsequent processing resumes at the *n*th + 1 character. Suppose you are again attempting to decipher code, and the idea is to work with only half the characters in a sequence that ends with a certain one, say upper or lowercase `Z`. The code you want might be:

```
[a-yA-Y]+[Zz] { yyless(yyleng/2);
    ... process first half of string ...   }
```

Finally, the function `REJECT` lets you more easily process strings of characters even when they overlap or contain one another as parts. `REJECT` does this by immediately jumping to the next rule and its specification without changing the contents of `yytext[]`. If you want to count the number of occurrences both of the regular expression `snapdragon` and of its subexpression `dragon` in an input text, the following will do:

```
snapdragon    {countflowers++; REJECT;}
dragon        countmonsters++;
```

As an example of one pattern overlapping another, the following counts the number of occurrences of the expressions `comedian` and `diana`, even where the input text has sequences such as `comediana..`:

```
comedian      {comiccount++; REJECT;}
diana         princesscount++;
```

Note that the actions here may be considerably more complicated than simply incrementing a counter. In all cases, you declare the counters and other necessary variables in the definitions section commencing the `lex` specification.

Definitions

The `lex` definitions section may contain any of several classes of items. The most critical are external definitions, preprocessor statements like `#include`, and abbreviations. Recall that for legal `lex` source this section is optional, but in most cases some of these items are necessary. Preprocessor statements and C source code should appear between a line of the form `%{` and one of the form `%}`.

All lines between these delimiters — including those that begin with white space — are copied to `lex.yy.c` immediately before the definition of `yylex()`. (Lines in the definition section that are not enclosed by the delimiters are copied to the same place *provided* they begin with white space.)

The definitions section is where you would normally place C definitions of objects accessed by actions in the rules section or by routines with external linkage.

One example occurs in using `lex` with `yacc`, which generates parsers that call a lexical analyzer. In this context, you should include the file `y.tab.h`, which may contain `#define`s for token names:

```
%{
#include "y.tab.h"
extern int tokval;
int lineno;
%}
```

After the %} that ends your #include's and declarations, you place your abbreviations for regular expressions to be used in the rules section. The abbreviation appears on the left of the line and, separated by one or more spaces, its definition or translation appears on the right.

When you later use abbreviations in your rules, be sure to enclose them within braces. Abbreviations avoid needless repetition in writing your specifications and make them easier to read.

As an example, reconsider the lex source reviewed in the section lex Advanced Features. The use of definitions simplifies our later reference to digits, letters, and blanks.

This is especially true if the specifications appear several times:

```
D               [0-9]
L               [a-zA-Z]
B               [ \t]+
%%
-{D}+           printf("negative integer");
\+?{D}+         printf("positive integer");
-0.{D}+         printf("negative fraction");
G{L}*           printf("may have a G word here");
rail{B}road     printf("railroad is one word");
crook           printf("criminal");
.               .
.               .
```

Start Conditions

Some problems require for their solution a greater sensitivity to prior context than is afforded by the ^ operator alone. You may want different rules to be applied to an expression depending on a prior context that is more complex than the end of a line or the start of a file.

In this situation you could set a flag to mark the change in context that is the condition for the application of a rule, then write code to test the flag. Alternatively, you could define for lex the different "start conditions" under which it is to apply each rule.

Consider this problem:

- Copy the input to the output, except change the word magic to the word first on every line that begins with the letter a

- Change `magic` to `second` on every line that begins with `b`
- Change `magic` to `third` on every line that begins with `c`. Here is how the problem might be handled with a flag.

Recall that `ECHO` is a `lex` macro equivalent to `printf("%s", yytext)`:

```
int flag
%%
^a {flag = 'a'; ECHO;}
^b {flag = 'b'; ECHO;}
^c {flag = 'c'; ECHO;}
\n {flag = 0; ECHO;}
magic {
switch (flag)
    {
        case 'a': printf("first"); break;
        case 'b': printf("second"); break;
        case 'c': printf("third"); break;
        default: ECHO; break;
    }
}
```

To handle the same problem with start conditions, each start condition must be introduced to `lex` in the definitions section with a line, such as the following one, where the conditions may be named in any order:

```
%Start name1 name2 ...
```

The word `Start` may be abbreviated to `S` or `s`. The conditions are referenced at the head of a rule with <> brackets. So the following is a rule that is only recognized when the scanner is in start condition *name1*:

```
<name1>expression
```

To enter a start condition, execute the action following statement:

```
BEGIN name1;
```

The above statement changes the start condition to *name1*. To resume the normal state, use the following:

```
BEGIN 0;
```

This resets the initial condition of the scanner.

A rule may be active in several start conditions. For example, the following is a legal prefix:

```
<name1,name2,name3>
```

Any rule not beginning with the <> prefix operators is always active.

The example can be written with start conditions as follows:

```
%Start AA BB CC
%%
^a          {ECHO; BEGIN AA;}
^b          {ECHO; BEGIN BB;}
^c          {ECHO; BEGIN CC;}
\n          {ECHO; BEGIN 0;}
<AA>magic   printf("first");
<BB>magic   printf("second");
<CC>magic   printf("third");
```

User Routines

It is possible to use your own routines in `lex` in much the same way that you do so in other programming languages. Action code that is to be used for several rules can be written once and called when needed. As with definitions, this can simplify the writing and reading of programs.

It is suggested that the function `put_in_tabl()`, to be discussed in the Using lex and yacc Together section ,be included in the user routines section of a `lex` specification.

Another reason to place a routine in this section is to highlight some code of interest or to simplify the rules section, even if the code is to be used for one rule only. As an example, consider the following routine to ignore comments in a language like C where comments occur between `/*` and `*/`:

```
%{
static skipcmnts();
%}
%%
"/*"                    skipcmnts();
.
.             /* rest of rules */
%%
static
skipcmnts()
{
    for(;;)
    {
        while (input() != '*')
            ;

        if (input() != '/')
            unput(yytext[yyleng-1])
        else return;
    }
}
```

There are three points of interest in this example.

- First, the `unput(c)` macro (putting back the last character read) is necessary to avoid missing the final `/` if the comment ends unusually with a `**/`.

  In this case, eventually having read a `*`, the scanner finds that the next character is not the terminal `/` and must read some more.

- Second, the expression `yytext[yyleng-1]` picks that last character read.

- Third, this routine assumes that the comments are not nested. That is indeed the case with the C language.

1

C++ Mangled Symbols

If the function name is a C++ mangled symbol, `lex` will print its demangled format. All mangled C++ symbols are bracketed by `[]` following the demangled symbol. For regular mangled C++ function names (including member and non-member functions), the function prototype is used as its demangled format.

For example,

```
_ct_13Iostream_initFv
```

is printed as:

```
Iostream_init::Iostream_init()
```

C++ static constructors and destructors are demangled and printed in the following format:

```
static constructor function for
```

or

```
static destructor function for
```

For example,

```
_std_stream_in_c_Fv
```

is demangled as

```
static destructor function for _stream_in_c
```

For C++ virtual table symbols, its mangled name takes the following format:

_vtbl_*class*

_vtbl_*root_class_derived_class*

In the `lex` output, the demangled names for the virtual table symbols are printed as

`virtual table for` *class*

`virtual table for class` *derived_class* `derived from` *root_class*

For example, the demangled format of

```
_vtbl_7fstream
```

is

```
virtual table for fstreamH
```

And the demangled format of

```
_vtbl_3ios_18ostream_withassign
```

is

```
virtual table for class ostream_withassign derived from ios
```

Some C++ symbols are pointers to the virtual tables; their mangled names take the following format:

_ptbl_*class_filename*

_ptbl_*root_class_derived_class_filename*

In the `lex` output, the demangled names for these symbols are printed as:

`pointer to virtual table for` *class* `in` *filename*

`pointer to virtual table for class` *derived class* `derived from` *root_class* `in` *filename*

For example, the demangled format of

```
_ptbl_3ios_stream_fstream_c
```

is

```
pointer to the virtual table for ios in _stream_fstream_c
```

and the demangled format of

```
_ptbl_3ios_11fstreambase_stream_fstream_c
```

is

```
_stream_fstream_c
pointer to the virtual table for class fstreambase derived
from ios in _stream_fstream_c
```

Using `lex` *and* `yacc` *Together*

If you work on a compiler project or develop a program to check the validity of an input language, you may want to use the system tool `yacc` (Chapter 3, "yacc — A Compiler Compiler). `yacc` generates parsers, programs that analyze input to insure that it is syntactically correct.

`lex` often combines with `yacc` in the compiler development context.

As noted, a program uses the `lex`-generated scanner by repeatedly calling the function `yylex()`. This name is convenient because a `yacc`-generated parser calls its lexical analyzer with this name.

To use `lex` to create the lexical analyzer for a compiler, you want to end each `lex` action with the statement `return` *`token`*, where *token* is a defined term whose value is an integer.

The integer value of the token returned indicates to the parser what the lexical analyzer has found. The parser, called `yyparse()` by `yacc`, then resumes control and makes another call to the lexical analyzer when it needs another token.

In a compiler, the different values of the token indicate what, if any, reserved word of the language has been found or whether an identifier, constant, arithmetic operator, or relational operator has been found. In the latter cases, the analyzer must also specify the exact value of the token: what the identifier is, whether the constant is, say, `9` or `888`, whether the operator is `+` or `*`, and whether the relational operator is = or >.

Consider the following portion of `lex` source for a scanner that recognizes tokens in a "C-like" language:

```
begin                   return(BEGIN);
end                     return(END);
while                   return(WHILE);
if                      return(IF);
package                 return(PACKAGE);
reverse                 return(REVERSE);
loop                    return(LOOP);
[a-zA-Z][a-zA-Z0-9]*    { tokval = put_in_tabl();
                        return(IDENTIFIER); }
[0-9]+                  { tokval = put_in_tabl();
                        return(INTEGER); }
\+                      { tokval = PLUS;
                        return(ARITHOP); }
\-                      { tokval = MINUS;
                        return(ARITHOP); }
>                       { tokval = GREATER;
                        return(RELOP); }
>=                      { tokval = GREATEREQL;
                        return(RELOP); }
```

Figure 1-2 Sample `lex` Source Recognizing Tokens

The tokens returned, and the values assigned to `tokval`, integers. Good programming style dictates the use of informative terms such as `BEGIN`, `END`, `WHILE`, and so forth to signify the integers the parser understands, rather than the use of the integers themselves.

You establish the association by using `#define` statements in your parser calling routine in C. For example:

```
#define BEGIN 1
#define END 2
    .
#define PLUS 7
    .
```

If the need arises to change the integer for some token type, you then change the `#define` statement in the parser rather than hunt through the entire program changing every occurrence of the particular integer.

In using `yacc` to generate your parser, insert the following statement in the definitions section of your `lex` source:

```
#include "y.tab.h"
```

The file `y.tab.h`, which is created when `yacc` is invoked with the `-d` option, provides `#define` statements that associate token names such as `BEGIN`, `END`, and so on with the integers of significance to the generated parser.

To indicate the reserved words in Figure 1-2, the returned integer values suffice. For the other token types, the integer value of the token type is stored in the variable `tokval`.

This variable, whose definition was an example in the definitions section, is globally defined so that the parser as well as the lexical analyzer can access it. `yacc` provides the variable `yylval` for the same purpose.

Note that Figure 1-2 shows two ways to assign a value to `tokval`.

- First, a function `put_in_tabl()` places the name and type of the identifier or constant in a symbol table so that the compiler can refer to it in this or a later stage of the compilation process.

More to the present point, `put_in_tabl()` assigns a type value to `tokval` so that the parser can use the information immediately to determine the syntactic correctness of the input text. The function `put_in_tabl()` would be a routine that the compiler writer might place in the user routines section of the parser.

- Second, in the last few actions of the example, `tokval` is assigned a specific integer indicating which arithmetic or relational operator the scanner recognized.

If the variable `PLUS`, for instance, is associated with the integer 7 by means of the `#define` statement above, then when a + is recognized, the action assigns to `tokval` the value 7, which indicates the +.

The scanner indicates the general class of operator by the value it returns to the parser (that is, the integer signified by `ARITHOP` or `RELOP`).

In using `lex` with `yacc`, either may be run first. The following command generates a parser in the file `y.tab.c`:

```
$ yacc -d grammar.y
```

As noted, the `-d` option creates the file `y.tab.h`, which contains the `#define` statements that associate the `yacc`-assigned integer token values with the user-defined token names. Now you can invoke `lex` with the following command:

```
$ lex lex.l
```

You can then compile and link the output files with the command:

```
$ cc lex.yy.c y.tab.c -ly -ll
```

Note that the `yacc` library is loaded (with the `-ly` option) before the `lex` library (with the `-ll` option) to insure that the supplied `main()` will call the `yacc` parser.

Automaton

Recognition of expressions in an input text is performed by a deterministic finite automaton generated by `lex`. The `-v` option prints a small set of statistics describing the finite automaton. (For a detailed account of finite automata and their importance for `lex`, see the Aho, Sethi, and Ullman text, *Compilers: Principles, Techniques, and Tools*, Addison-Wesley, 1986.)

`lex` uses a table to represent its finite automaton. The maximum number of states that the finite automaton allows is set by default to 500. If your `lex` source has a large number of rules or the rules are very complex, this default value may be too small.

You can enlarge the value by placing another entry in the definitions section of your `lex` source as follows:

```
%n 700
```

This entry tells `lex` to make the table large enough to handle as many as 700 states. (The `-v` option will indicate how large a number you should choose.)

If you have need to increase the maximum number of state transitions beyond 2000, the designated parameter is `a`, thus:

```
%a 2800
```

Finally, check the for a list of all the options available with the `lex` command, or type `man lex`.

Summary of Source Format

- The general form of a `lex` source file is:

```
definitions
%%
rules
%%
user routines
```

The definitions section contains any combination of:

- Definitions of abbreviations in the form:

```
name space translation
```

- Included code in the form:

```
%{
C code
%}
```

- Start conditions in the form:

```
Start name1 name2 ...
```

- Changes to internal array sizes in the form:

```
%x nnn
```

where *nnn* is a decimal integer representing an array size and *x* selects the parameter.

Changes to internal array sizes could be represented as follows:

Table 1-2 Internal Array Sizes

p	Positions
n	States
e	Tree nodes
a	Transitions
k	Packed character classes
o	Output array size

- Lines in the rules section have the form:

```
expressionaction
```

where the action may be continued on succeeding lines by using braces to mark it.

The `lex` operator characters are:

```
" \ [] ^ - ? .  * | () $ / {} <> +
```

Important `lex` variables, functions, and macros are:

Table 1-3 `lex` Variables, Functions, and Macros

`yytext[]`	array of `char`
`yyleng`	`int`
`yylex()`	function
`yywrap()`	function
`yymore()`	function
`yyless(n)`	function
`REJECT`	macro
`ECHO`	macro
`input()`	macro
`unput(c)`	macro
`output(c)`	macro

1